
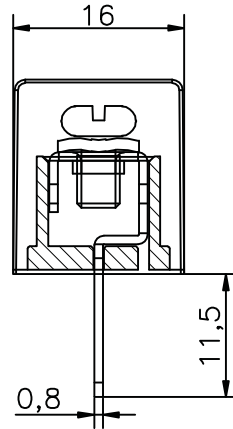
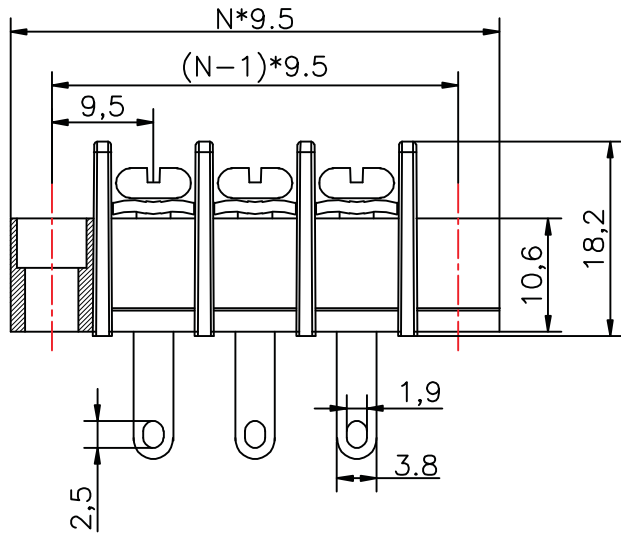


RoHS Compliant Customer Drawing

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

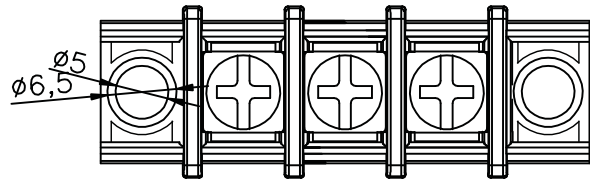

**材质及电镀(Material)**

塑件(Housing): PA66, UL94V-0  
 端子(Terminal): 黄铜, 0.8t; 镀锡(Brass, Tin plated)  
 螺丝(Screw): M4, 钢, 镀镍(Steel, Ni-Plated)

**电气性能(Electrical)**

额定电压(Rated Voltage): 300V  
 额定电流(Rated Current): 25A  
 绝缘电阻(Insulation Resistance): 500MΩ/DC500V  
 耐电压(Withstanding Voltage): AC2000V/Min

**机械性能(Mechanical)**

温度范围(Temperature Range): -40℃~ +105℃  
 适用线径(Wire Range): 22-14AWG  
 最大扭矩值(Max. Torque Value): 0.5N.m 4.4Lb.in

**订购方式/ HOW TO ORDER**

P

型号 Series NO.      极数 NO. of Pole      间距 Pitch      颜色 Color

1	单间距	1	灰色
	Single Pitch	2	蓝色
2	双间距	3	黑色
	Double Pitch	4	绿色

客户需求 Customer Request

N=No. of contacts

**Contact Us**

TEL: +86 - 574 - 63510149

FAX: +86 - 574 - 63516735

E-Mail: Sales@cxsuteng.com

Website: www.cxsuteng.com

公差一览表				慈溪市速腾电子有限公司					
TOLERANCE UNLESS OTHERWISE				SUTOWN CIXI SUTENG ELECTRONIC CO., LTD					
X.	±0.25	X°	±5°	单位	mm	制图	No.01	产品名称	ST45H-9.50
.X	±0.20	.X°	±2°	角法		设计	No.06	型号	
.XX	±0.15	.XX°	±1°	比例	1:1	审核		产品料号	ST45H-9.50
.XXX	±0.02	.XXX°	±0.5°	日期	2012.07.10	核准		图号	ST45H-9.50
				版本	A0	批准		图号	ST45H-9.50
				DATE		APPD		DRAW NO.	